


The MULTICRACKER MC300 is suitable for a wide range of applications.

Suitable for a wide range of applications with medium capacity demand e.g in the animal feed industry or for basic applications in the food and beverage industry.



MC 300  
25tn/hr

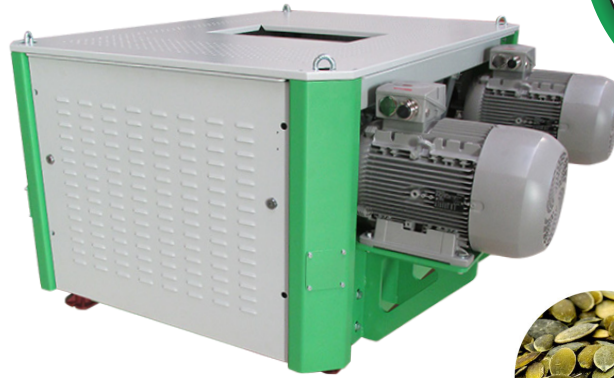

BEFORE



AFTER



## ADVANTAGES

- Gentle, efficient processing of raw material
- PLC capable intergration
- Homogenous ground product
- No material heating
- Compact design



## CONFIGURATION

- Manual, stepless adjustment of grinding gap
- Enclosed grinding unit
- Crackerdiscs resharpenable
- Foreign object protection with springs
- Three disc profiles to choose from: coarse, medium, fine



## SPECIFICATIONS

- Throughout: Up to 25 tons/hr
- Input Chute: 462 x 242mm
- Output Chute: 462 x 150mm
- Dimensions 1638 x 1547 x 835mm (L x W x H)
- Driving Power: 2 x 15kw Motor
- Weight: 1300kg



## OPTIONS

- Input/output chute size to meet your requirements
- Twin version for two stage grinding
- Destomer (incl. permanet magnet and feed roll)



## APPLICATION

Some products - Polutry feed, Wheat, Corn, Mesh Feed and much more.

MULTICRACKER uses revolutionary technology for effectively crushing bulk goods by a method of grinding with special Multicracker discs. It combines innovation and efficiency in one machine and can reduce power consumption. On average it takes just 1 kW of energy per tonne of material.